



**STATE OF MAINE**  
**DEPARTMENT OF ENVIRONMENTAL PROTECTION**  
 17 STATE HOUSE STATION | AUGUSTA, MAINE 04333-0017  
**DEPARTMENT ORDER**

**Eurovia Atlantic Coast LLC  
 Hancock County  
 Hancock, Maine  
 A-49-71-R-R/A**

**Departmental  
 Findings of Fact and Order  
 Air Emission License  
 Renewal and Amendment**

**Findings of Fact**

After review of the air emission license renewal application, staff investigation reports, and other documents in the applicant’s file in the Bureau of Air Quality, pursuant to 38 Maine Revised Statutes (M.R.S.) § 344 and § 590, the Maine Department of Environmental Protection (Department) finds the following facts:

**I. Registration**

A. Introduction

Eurovia Atlantic Coast LLC (Eurovia) has applied to renew their Air Emission License for the operation of their stationary hot mix asphalt plant, located at 32 Washington Junction Road, Hancock, Maine. The main office is located at 953 Odlin Road, Bangor, Maine.

Eurovia has requested an amendment to their license in order to remove the Kolman Generator, and increase the heat input limit for the HYCO 200 Hot Oil Heater from 4,200 MMBtu/yr to 6,000 MMBtu/yr.

B. Emission Equipment

The following equipment is addressed in this air emission license:

**Asphalt Plant**

<b>Equipment</b>	<b>Process Rate (tons/hr)</b>	<b>Design Capacity (MMBtu/hr)</b>	<b>Fuel Type</b>	<b>Control Device</b>	<b>Date of Manuf.</b>
Hot Mix Asphalt Batch Plant (Asphalt Plant #28)	240	82	Distillate Fuel Spec. Waste Oil	Baghouse	<b>Plant:</b> Pre-1973 <b>Burner:</b> 2017
		80	Propane		
		89	Natural Gas		

**Heating Equipment**

Equipment	Max. Capacity (MMBtu/hr)	Fuel Type	Maximum Firing Rate	Date of Manuf.
HYCO 200 (Hot Oil Heater)	2.0	Distillate Fuel	14.6 gal/hr	2000
		Propane	22.1 gal/hr	
		Natural Gas	1941.8 scf/hr	

**Engines**

Unit ID	Max. Capacity (MMBtu/hr)	Max. Firing Rate (gal/hr)	Fuel Type	Date of Manuf.
<i>Kolman Diesel *</i>	<i>0.41</i>	<i>2.95</i>	<i>Distillate Fuel</i>	<i>1971</i>

\* Being removed from license

C. Definitions

Distillate Fuel means the following:

- Fuel oil that complies with the specifications for fuel oil numbers 1 or 2, as defined by the American Society for Testing and Materials (ASTM) in ASTM D396;
- Diesel fuel oil numbers 1 or 2, as defined in ASTM D975;
- Kerosene, as defined in ASTM D3699;
- Biodiesel, as defined in ASTM D6751; or
- Biodiesel blends, as defined in ASTM D7467.

Records or Logs mean either hardcopy or electronic records.

Specification Waste Oil means a petroleum-based oil which, through use or handling, has become unsuitable for its original purpose due to the presence of impurities or loss of original properties, and meets all of the following requirements:

- It has sufficient liquid content to be free flowing;
- It meets all of the constituent and property standards as specified in *Waste Oil Management Rules*, 06-096 C.M.R. ch. 860;
- It does not otherwise exhibit hazardous waste characteristics; and
- It has not been mixed with a hazardous waste.

D. Application Classification

All rules, regulations, or statutes referenced in this air emission license refer to the amended version in effect as of the date this license was issued.

Eurovia has applied to renew currently licensed emission units as well as amend their license as addressed in Section I(A) above.

The modification of a minor source is considered a major or minor modification based on whether or not expected emission increases exceed the “Significant Emissions” levels as defined in the Department’s *Definitions Regulation*, 06-096 Code of Maine Rules (C.M.R.) ch. 100. The emission increases are determined by subtracting the current licensed annual emissions preceding the modification from the maximum future licensed annual emissions, as follows:

<b>Pollutant</b>	<b>Current License (tpy)</b>	<b>Future License (tpy)</b>	<b>Net Change (tpy)</b>	<b>Significant Emissions Levels</b>
PM	5.0	5.1	+0.1	100
PM <sub>10</sub>	5.0	5.1	+0.1	100
PM <sub>2.5</sub>	5.0	5.1	+0.1	100
SO <sub>2</sub>	14.3	14.7	+0.4	100
NO <sub>x</sub>	18.3	18.4	+0.1	100
CO	60.1	60.3	+0.2	100
VOC	5.5	5.5	--	50*

\* Eurovia is located in an area of the state included in the Ozone Transport Region. Therefore, the significant emissions level for VOC is 50 tpy.

Therefore, this license is considered to be both a renewal and a minor modification and has been processed through *Major and Minor Source Air Emission License Regulations*, 06-096 Code of Maine Rules C.M.R. ch. 115.

**E. Facility Classification**

With the annual heat input limit on the hot oil heater and the processing limit on the asphalt plant, the facility is licensed as follows:

- As a synthetic minor source of air emissions for criteria pollutants, because Eurovia is subject to license restrictions that keep facility emissions below major source thresholds for NO<sub>x</sub> and CO; and
- As an area source of hazardous air pollutants (HAP), because the licensed emissions are below the major source thresholds for HAP.

## II. Best Practical Treatment (BPT)

### A. Introduction

In order to receive a license, the applicant must control emissions from each unit to a level considered by the Department to represent Best Practical Treatment (BPT), as defined in *Definitions Regulation*, 06-096 C.M.R. ch. 100. Separate control requirement categories exist for new and existing equipment.

BPT for existing emissions equipment means that method which controls or reduces emissions to the lowest possible level considering:

- the existing state of technology;
- the effectiveness of available alternatives for reducing emissions from the source being considered; and
- the economic feasibility for the type of establishment involved.

### B. Hot Mix Asphalt Batch Plant (Asphalt Plant #28)

Eurovia operates a stationary asphalt batch mix plant (Asphalt Plant #28) with a maximum throughput of 240 ton/hr of asphalt. The burner in Plant #28 was upgraded in 2017, with a heat input capacity between 80 MMBtu/hr and 89 MMBtu/hr, depending on which fuel is used. Asphalt Plant #28 can fire distillate fuel, specification waste oil, propane, or natural gas.

Emission factors for asphalt plants are available based on tons of asphalt produced, and there is no linear relationship between plant output and burner firing rate. Therefore, to ensure annual emissions are limited to less than major source thresholds, asphalt throughput is limited instead of fuel consumption. Accordingly, the annual throughput of the asphalt plant shall not exceed 300,000 tons of asphalt per year on a calendar year total basis.

#### 1. BPT Findings

The BPT emission limits for Asphalt Plant #28 were based on the following:

##### Distillate Fuel and Specification Waste Oil

- PM/PM<sub>10</sub>/PM<sub>2.5</sub> – 0.03 gr/dscf and the use of a baghouse pursuant to 06-096 C.M.R. ch. 115, BPT
- SO<sub>2</sub> – 0.088 lb/ton based on AP-42 Table 11.1-5 dated 3/04
- NO<sub>x</sub> – 0.12 lb/ton based on AP-42 Table 11.1-5 dated 3/04
- CO – 0.40 lb/ton based on AP-42 Table 11.1-5 dated 3/04
- VOC – 0.036 lb/ton based on AP-42 Table 11.1-6 dated 3/04
- Visible Emissions – 06-096 C.M.R. ch. 101

Natural Gas and Propane

PM/PM10/PM2.5 – 0.03 gr/dscf and the use of a baghouse pursuant to 06-096 C.M.R. ch. 115, BPT  
SO<sub>2</sub> – 0.0046 lb/ton based on AP-42 Table 11.1-5 dated 3/04  
NO<sub>x</sub> – 0.025 lb/ton based on AP-42 Table 11.1-5 dated 3/04  
CO – 0.40 lb/ton based on AP-42 Table 11.1-5 dated 3/04  
VOC – 0.0082 lb/ton based on AP-42 Table 11.1-6 dated 3/04  
Visible Emissions– 06-096 C.M.R. ch. 101

The BPT emission limits for Asphalt Plant #28 are the following:

<b>Fuel</b>	<b>PM (lb/hr)</b>	<b>PM<sub>10</sub> (lb/hr)</b>	<b>PM<sub>2.5</sub> (lb/hr)</b>	<b>SO<sub>2</sub> (lb/hr)</b>	<b>NO<sub>x</sub> (lb/hr)</b>	<b>CO (lb/hr)</b>	<b>VOC (lb/hr)</b>
Distillate Fuel/ Spec. Waste Oil	7.86	7.86	7.86	21.12	28.80	96.00	8.64
Propane/ Natural Gas	7.86	7.86	7.86	1.10	6.00	96.00	1.97

Visible emissions from the Asphalt Plant #28 baghouse shall not exceed 20% opacity on a six-minute block average basis.

General process emissions from the asphalt plant shall be controlled so as to prevent visible emissions in excess of 20% opacity on a six-minute block average basis.

With limited exceptions, no person shall import, distribute, or offer for sale any distillate fuel with a sulfur content greater than 0.0015% by weight (15 ppm) pursuant to 38 M.R.S. § 603-A(2)(A)(3). Therefore, the distillate fuel purchased or otherwise obtained for use in Plant #28 shall not exceed 0.0015% by weight (15 ppm).

2. New Source Performance Standards

Asphalt Plant #28 was manufactured before 1973 and is therefore not subject to the U.S. Environmental Protection Agency's (EPA) New Source Performance Standards (NSPS) *Standards of Performance for Hot Mix Asphalt Facilities*, 40 Code of Federal Regulation (C.F.R.) Part 60, Subpart I for facilities constructed or modified after June 11, 1973. Although Plant #28 had its burner replaced in 2017, the change does not fit the definition of a modification as defined in 40 C.F.R. § 60.2 because it did not increase emissions into the atmosphere of any air pollutant to which a standard applies.

3. Control Equipment

Emissions from Asphalt Plant #28 shall be controlled by a baghouse.

4. Periodic Monitoring

The performance of the baghouse shall be monitored by either one of the following at all times the asphalt plant is operating:

- a. Continuous PM detector: When the detector signals excessive PM concentrations in the exhaust stream, Eurovia shall take corrective action within 24 hours, or immediately if visible emissions exceed 20% opacity.
- b. Personnel available on-site with a current EPA 40 C.F.R. Part 60, Appendix A, Method 9 visible emissions certification: When visible emissions exceed 20% opacity, the hot mix asphalt plant is operating with insufficient control, and corrective action shall be taken immediately.

Eurovia shall keep records of baghouse failures, baghouse maintenance, and baghouse inspections.

To document maintenance of the baghouse, Eurovia shall keep records of the date and location of all bag failures, the date and a description of all routine and non-routine maintenance, and the date and results of all inspections. These records shall be kept on-site at the asphalt plant location. Records shall also be maintained recording the quantity and analyzed test results of all specification waste oil fired in the unit.

5. Contaminated Soils

a. Soils Contaminated with Gasoline and Distillate Fuel

Eurovia may process up to 10,000 cubic yards per calendar year of soil contaminated by gasoline or distillate fuel without prior approval from the Department's Bureau of Air Quality.

This limit may be exceeded with prior written authorization from the Department's Bureau of Air Quality. Requests will be evaluated on a case-by-case basis taking into account the nature and amount of the contaminated soil to be processed, the location where the processing will occur, and the potential for fugitive emissions.

Processing virgin oil contaminated soils may also require a solid waste processing facility license under Maine Solid Waste Management Rules, 06-096 C.M.R. ch. 409, before processing of virgin oil contaminated soils

may occur. The material shall be handled in accordance with the requirements of the Department's Bureau of Remediation and Waste Management.

b. General Requirements for Processing of Contaminated Soils

Eurovia shall not process soils which are classified as hazardous waste or which have unknown contaminants.

Eurovia shall notify the Department (regional air compliance inspector) at least 24 hours prior to processing any contaminated soil and specify the contaminating material and quantity, origin of the soil and contaminating material, and the disposition of the contaminated soil. This authorization to process contaminated soil does not absolve the facility of responsibility to comply with all other air emission license conditions and any other applicable state rules or statutes.

When processing contaminated soils, Eurovia shall maintain records which specify the quantity and type of contaminant in the soil as well as the origin and characterization of the contaminated soil. In addition, when processing contaminated soil, Eurovia shall maintain records on an hourly basis of processing temperature, asphalt feed rates, and dryer throughput.

Any approval from the Department's Bureau of Air Quality to process contaminated soil does not supersede requirements from other Department bureaus. Similarly, approvals to process contaminated soil granted by another Department bureau does not supersede the limits imposed by this air emission license.

C. HYCO 200 Hot Oil Heater

Eurovia operates HYCO 200 to prevent the asphalt from solidifying. It has a maximum design capacity of 2.0 MMBtu/hr and fires distillate fuel, propane, and natural gas.

With limited exceptions, no person shall import, distribute, or offer for sale any distillate fuel with a sulfur content greater than 0.0015% by weight (15 ppm) pursuant to 38 M.R.S. § 603-A(2)(A)(3). Therefore, the distillate fuel purchased or otherwise obtained for use in HYCO 200 shall not exceed 0.0015% by weight (15 ppm).

1. BPT Findings

The BPT emission limits for HYCO 200 were based on the following:

Firing Distillate Fuel

- PM/PM<sub>10</sub>/PM<sub>2.5</sub> – 0.08 lb/MMBtu based on 06-096 C.M.R. ch. 115, BPT
- SO<sub>2</sub> – based on firing distillate fuel with a maximum sulfur content of 0.0015% by weight
- NO<sub>x</sub> – 20 lb/1,000 gal based on AP-42 Table 1.3-1 dated 5/10
- CO – 5 lb/1,000 gal based on AP-42 Table 1.3-1 dated 5/10
- VOC – 0.34 lb/1,000 gal based on AP-42 Table 1.3-3 dated 5/10
- Visible Emissions – 06-096 C.M.R. ch. 101

Firing Propane

- PM/PM<sub>10</sub>/PM<sub>2.5</sub> – 0.05 lb/MMBtu based on 06-096 C.M.R. ch. 115, BPT
- SO<sub>2</sub> – 0.054 lb/1,000 gal based on AP-42 Table 1.5-1 dated 5/25
- NO<sub>x</sub> – 13 lb/1,000 gal based on AP-42 Table 1.5-1 dated 5/25
- CO – 7.5 lb/1,000 gal based on AP-42 Table 1.5-1 dated 5/25
- VOC – 1 lb/1,000 gal based on AP-42 Table 1.5-1 dated 5/25
- Visible Emissions – 06-096 C.M.R. ch. 101

Firing Natural Gas

- PM/PM<sub>10</sub>/PM<sub>2.5</sub> – 0.05 lb/MMBtu based on 06-096 C.M.R. ch. 115, BPT
- SO<sub>2</sub> – 0.6 lb/MMscf based on AP-42 Table 1.4-2 dated 7/98
- NO<sub>x</sub> – 100 lb/MMscf based on AP-42 Table 1.4-1 dated 7/98
- CO – 84 lb/MMscf based on AP-42 Table 1.4-1 dated 7/98
- VOC – 5.5 lb/MMscf based on AP-42 Table 1.4-2 dated 7/98
- Visible Emissions – 06-096 C.M.R. ch. 101

The BPT emission limits for HYCO 200 are the following:

<b>Fuel</b>	<b>PM (lb/hr)</b>	<b>PM<sub>10</sub> (lb/hr)</b>	<b>PM<sub>2.5</sub> (lb/hr)</b>	<b>SO<sub>2</sub> (lb/hr)</b>	<b>NO<sub>x</sub> (lb/hr)</b>	<b>CO (lb/hr)</b>	<b>VOC (lb/hr)</b>
Distillate Fuel	0.16	0.16	0.16	--	0.29	0.07	--
Propane	0.10	0.10	0.10	--	0.28	0.16	0.02
Natural Gas	0.10	0.10	0.10	--	0.19	0.16	0.01

HYCO 200 shall be limited to a heat input of 6,000 MMBtu of all fuels combined on a calendar year total basis.

2. Visible Emissions

Firing Distillate Fuel

Visible emissions from HYCO 200 shall not exceed 20% opacity on a six-minute block average basis.

Firing Propane or Natural Gas

Visible emissions from HYCO 200 shall not exceed 10% opacity on a six-minute block average basis.

3. Periodic Monitoring

Periodic monitoring for HYCO 200 shall include recordkeeping to document fuel use both on a monthly and calendar year total basis. Documentation shall include the type of fuel used and sulfur content of the fuel, if applicable.

Documentation shall also include calculated heat input to demonstrate compliance with the limit of total heat input on a calendar year total basis.

4. New Source Performance Standards: 40 C.F.R. Part 60, Subpart Dc

HYCO 200 does not heat water. it does not meet the definition of a 'steam generating unit and therefore is not subject to the New Source Performance Standards (NSPS) *Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units*, 40 C.F.R. Part 60, Subpart Dc for units greater than 10 MMBtu/hr manufactured after June 9, 1989.

[40 C.F.R. § 60.40c]

5. National Emission Standards for Hazardous Air Pollutants (NESHAP): 40 C.F.R. Part 63, Subpart JJJJJJ

HYCO 200 does not heat water. It does not meet the definition of a "boiler" and therefore is not subject to *National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources*, 40 C.F.R. Part 63, Subpart JJJJJJ.

D. General Process Emissions

Visible emissions from any general process source shall not exceed 20% opacity on a six-minute block average basis.

**E. Fugitive Emissions**

Eurovia shall not cause emissions of any fugitive dust during any period of construction, reconstruction, or operation without taking reasonable precautions. Such reasonable precautions shall be included in the facility’s continuing program of best management practices for suppression of fugitive particulate matter. See 06-096 C.M.R. ch. 101, § 4(C) for a list of potential reasonable precautions.

Eurovia shall not cause or allow visible emissions within 20 feet of ground level, measured as any level of opacity and not including water vapor, beyond the legal boundary of the property on which such emissions occur. Compliance with this standard shall be determined pursuant to 40 C.F.R. Part 60, Appendix A, Method 22.

**F. Annual Emissions**

The table below provides an estimate of facility-wide annual emissions for the purposes of calculating the facility’s annual air license fee and establishing the facility’s potential to emit (PTE). Only licensed equipment is included, i.e., emissions from insignificant activities are excluded. Similarly, unquantifiable fugitive particulate matter emissions are not included except when required by state or federal regulations. Maximum potential emissions were calculated based on the following assumptions:

- Processing 300,000 tons per year of asphalt in Asphalt Plant #28; and
- A heat input limit on HYCO 200 of 6,000 MMBtu/yr of all fuels combined.

This information does not represent a comprehensive list of license restrictions or permissions. That information is provided in the Order section of this license.

**Total Licensed Annual Emissions for the Facility  
Tons/year**

(used to calculate the annual license fee)

	<b>PM</b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>	<b>NO<sub>x</sub></b>	<b>CO</b>	<b>VOC</b>
Asphalt Plant #28	4.9	4.9	4.9	13.2	18.0	60.0	5.4
HYCO 200	0.2	0.2	0.2	--	0.4	0.3	0.1
<b>Total TPY</b>	<b>5.1</b>	<b>5.1</b>	<b>5.1</b>	<b>13.2</b>	<b>18.4</b>	<b>60.3</b>	<b>5.5</b>

<b>Pollutant</b>	<b>Tons/year</b>
Single HAP	7.9
Total HAP	19.9

### **III. Ambient Air Quality Analysis**

The level of ambient air quality impact modeling required for a minor source is determined by the Department on a case-by-case basis. In accordance with 06-096 C.M.R. ch. 115, an ambient air quality impact analysis is not required for a minor source if the total licensed annual emissions of any pollutant released do not exceed the following levels and there are no extenuating circumstances:

<b>Pollutant</b>	<b>Tons/Year</b>
PM <sub>10</sub>	25
PM <sub>2.5</sub>	15
SO <sub>2</sub>	50
NO <sub>x</sub>	50
CO	250

The total licensed annual emissions for the facility are below the emission levels contained in the table above and there are no extenuating circumstances; therefore, an ambient air quality impact analysis is not required as part of this license.

This determination is based on information provided by the applicant regarding licensed emission units. If the Department determines that any parameter (e.g., stack size, configuration, flow rate, emission rates, nearby structures, etc.) deviates from what was included in the application, the Department may require Eurovia to submit additional information and may require an ambient air quality impact analysis at that time.

### **Order**

Based on the above Findings and subject to conditions listed below, the Department concludes that the emissions from this source:

- will receive Best Practical Treatment,
- will not violate applicable emission standards, and
- will not violate applicable ambient air quality standards in conjunction with emissions from other sources.

The Department hereby grants Air Emission License A-49-71-R-R/A subject the following conditions.

Severability. The invalidity or unenforceability of any provision of this License or part thereof shall not affect the remainder of the provision or any other provisions. This License shall be construed and enforced in all respects as if such invalid or unenforceable provision or part thereof had been omitted.

## **Standard Conditions**

- (1) Employees and authorized representatives of the Department shall be allowed access to the licensee's premises during business hours, or any time during which any emissions units are in operation, and at such other times as the Department deems necessary for the purpose of performing tests, collecting samples, conducting inspections, or examining and copying records relating to emissions (38 M.R.S. § 347-C).
- (2) The licensee shall acquire a new or amended air emission license prior to beginning actual construction of a modification, unless specifically provided for in Chapter 115. [06-096 C.M.R. ch. 115]
- (3) Approval to construct shall become invalid if the source has not commenced construction within eighteen (18) months after receipt of such approval or if construction is discontinued for a period of eighteen (18) months or more. The Department may extend this time period upon a satisfactory showing that an extension is justified, but may condition such extension upon a review of either the control technology analysis or the ambient air quality standards analysis, or both. [06-096 C.M.R. ch. 115]
- (4) The licensee shall establish and maintain a continuing program of best management practices for suppression of fugitive particulate matter during any period of construction, reconstruction, or operation which may result in fugitive dust, and shall submit a description of the program to the Department upon request. [06-096 C.M.R. ch. 115]
- (5) The licensee shall pay the annual air emission license fee to the Department, calculated pursuant to Title 38 M.R.S. § 353-A. [06-096 C.M.R. ch. 115] Payment of the annual air emission license fee for Eurovia is due by the end of May of each year. [38 M.R.S. § 353-A(3)]
- (6) The license does not convey any property rights of any sort, or any exclusive privilege. [06-096 C.M.R. ch. 115]
- (7) The licensee shall maintain and operate all emission units and air pollution systems required by the air emission license in a manner consistent with good air pollution control practice for minimizing emissions. [06-096 C.M.R. ch. 115]
- (8) The licensee shall maintain sufficient records to accurately document compliance with emission standards and license conditions and shall maintain such records for a minimum of six (6) years. The records shall be submitted to the Department upon written request. [06-096 C.M.R. ch. 115]

- (9) The licensee shall comply with all terms and conditions of the air emission license. The filing of an appeal by the licensee, the notification of planned changes or anticipated noncompliance by the licensee, or the filing of an application by the licensee for a renewal of a license or amendment shall not stay any condition of the license. [06--096 C.M.R. ch. 115]
- (10) The licensee may not use as a defense in an enforcement action that the disruption, cessation, or reduction of licensed operations would have been necessary in order to maintain compliance with the conditions of the air emission license. [06-096 C.M.R. ch. 115]
- (11) In accordance with the Department's air emission compliance test protocol and 40 C.F.R. Part 60 or other method approved or required by the Department, the licensee shall:
- A. Perform stack testing to demonstrate compliance with the applicable emission standards under circumstances representative of the facility's normal process and operating conditions:
    - 1. Within sixty (60) calendar days of receipt of a notification to test from the Department or EPA, if visible emissions, equipment operating parameters, staff inspection, air monitoring or other cause indicate to the Department that equipment may be operating out of compliance with emission standards or license conditions; or
    - 2. Pursuant to any other requirement of this license to perform stack testing.
  - B. Install or make provisions to install test ports that meet the criteria of 40 C.F.R. Part 60, Appendix A, and test platforms, if necessary, and other accommodations necessary to allow emission testing; and
  - C. Submit a written report to the Department within thirty (30) days from date of test completion.  
[06-096 C.M.R. ch. 115]
- (12) If the results of a stack test performed under circumstances representative of the facility's normal process and operating conditions indicate emissions in excess of the applicable standards, then:
- A. Within thirty (30) days following receipt of the written test report by the Department, or another alternative timeframe approved by the Department, the licensee shall re-test the non-complying emission source under circumstances representative of the facility's normal process and operating conditions and in accordance with the Department's air emission compliance test protocol and 40 C.F.R. Part 60 or other method approved or required by the Department; and

B. The days of violation shall be presumed to include the date of stack test and each and every day of operation thereafter until compliance is demonstrated under normal and representative process and operating conditions, except to the extent that the facility can prove to the satisfaction of the Department that there were intervening days during which no violation occurred or that the violation was not continuing in nature; and

C. The licensee may, upon the approval of the Department following the successful demonstration of compliance at alternative load conditions, operate under such alternative load conditions on an interim basis prior to a demonstration of compliance under normal and representative process and operating conditions.

[06-096 C.M.R. ch. 115]

(13) Notwithstanding any other provisions in the State Implementation Plan approved by the EPA or Section 114(a) of the CAA, any credible evidence may be used for the purpose of establishing whether a person has violated or is in violation of any statute, regulation, or license requirement. [06-096 C.M.R. ch. 115]

(14) The licensee shall maintain records of malfunctions, failures, downtime, and any other similar change in operation of air pollution control systems or the emissions unit itself that would affect emissions and that is not consistent with the terms and conditions of the air emission license. The licensee shall notify the Department within two (2) days or the next state working day, whichever is later, of such occasions where such changes result in an increase of emissions. The licensee shall report all excess emissions in the units of the applicable emission limitation. [06-096 C.M.R. ch. 115]

(15) Upon written request from the Department, the licensee shall establish and maintain such records, make such reports, install, use and maintain such monitoring equipment, sample such emissions (in accordance with such methods, at such locations, at such intervals, and in such a manner as the Department shall prescribe), and provide other information as the Department may reasonably require to determine the licensee's compliance status. [06-096 C.M.R. ch. 115]

(16) The licensee shall notify the Department within 48 hours and submit a report to the Department on a quarterly basis if a malfunction or breakdown in any component causes a violation of any emission standard (38 M.R.S. § 605).

## **Specific Conditions**

### **(17) Hot Mix Asphalt Batch Plant (Asphalt Plant #28)**

#### **A. Fuel Use**

1. Asphalt Plant #28 is licensed to fire distillate fuel, specification waste oil, natural gas, and propane. [06-096 C.M.R. ch. 115, BPT]
2. Eurovia shall not purchase or otherwise obtain distillate fuel with a maximum sulfur content that exceeds 0.0015% by weight (15 ppm). [06-096 C.M.R. ch. 115, BPT]
3. Eurovia shall not purchase or otherwise obtain specification waste oil with a maximum sulfur content that exceeds 0.7% by weight. [06-096 C.M.R. ch. 115, BPT]

B. The annual throughput of the asphalt plant shall not exceed 300,000 tons of asphalt per year on a 12-month rolling total basis. Records of asphalt production shall be kept on a monthly and 12-month rolling total basis. [06-096 C.M.R. ch. 115, BPT]

C. Emissions from the asphalt plant shall vent to a baghouse, and all components of the asphalt plant shall be maintained so as to prevent PM leaks. [06-096 C.M.R. ch. 115, BPT]

D. The performance of the baghouse shall be monitored by either one of the following at all times the hot mix asphalt plant is operating: [06-096 C.M.R. ch. 115, BPT]

1. Continuous PM detector: When the detector signals excessive PM concentrations in the exhaust stream, Eurovia shall take corrective action within 24 hours, or immediately if opacity exceeds 20%.
2. Personnel available on-site with a current EPA Method 9 visible emissions certification: When visible emissions exceed 20% opacity, the asphalt plant is operating with insufficient control, and corrective action shall be taken immediately.

E. To document maintenance of the baghouse, Eurovia shall keep records of the date and location of all bag failures, the date and a description of all routine and non-routine maintenance, and the date and results of all inspections. These records shall be kept on-site at the asphalt plant location. [06-096 C.M.R. ch. 115, BPT]

F. Emissions from the asphalt plant baghouse shall not exceed the following [06-096 C.M.R. ch. 115, BPT]:

<b>Pollutant</b>	<b>(gr/dscf)</b>	<b>Distillate Fuel or Spec. Waste Oil (lb/hr)</b>	<b>Natural Gas or Propane (lb/hr)</b>
PM	0.03	7.86	7.86
PM <sub>10</sub>	–	7.86	7.86
PM <sub>2.5</sub>	–	7.86	7.86
SO <sub>2</sub>	–	21.12	1.10
NO <sub>x</sub>	–	28.80	6.00
CO	–	96.00	96.00
VOC	–	8.64	1.97

- G. Visible emissions from the baghouse is limited to no greater than 20% opacity on a six-minute block average basis. [06-096 C.M.R. ch. 101, § 4(B)(1)]
- H. General process emissions from the hot mix asphalt plant shall be controlled so as to prevent visible emissions in excess of 20% opacity on a six-minute block average basis. [06-096 C.M.R. ch. 101, § 4(B)(4)]

I. Contaminated Soils

1. Soils Contaminated with Gasoline and Distillate Fuel

Eurovia may process up to 10,000 cubic yards per calendar year of soil contaminated by gasoline or distillate fuel without prior approval from the Department's Bureau of Air Quality.

This limit may be exceeded with prior written authorization from the Department's Bureau of Air Quality. Requests will be evaluated on a case-by-case basis taking into account the nature and amount of the contaminated soil to be processed, the location where the processing will occur, and the potential for fugitive emissions.

2. General Requirements for Contaminated Soils

- a. Eurovia shall not process soils which are classified as hazardous waste or which have unknown contaminants.
- b. Eurovia shall notify the Department (regional air compliance inspector) at least 24 hours prior to processing any contaminated soil and specify the contaminating material and quantity, origin of the soil and contaminating material, and the disposition of the contaminated soil. This authorization to process contaminated soil does not absolve the

facility of responsibility to comply with all other air emission license conditions and any other applicable state rules or statutes.

- c. When processing contaminated soils, Eurovia shall maintain records which specify the quantity and type of contaminant in the soil as well as the origin and characterization of the contaminated soil. In addition, when processing contaminated soil, Eurovia shall maintain records on an hourly basis of processing temperature, asphalt feed rates, and dryer throughput.

[06-096 C.M.R. ch. 115, BPT]

**(18) HYCO 200 Hot Oil Heater**

**A. Fuel**

- 1. HYCO 200 shall be limited to a heat input of 6,000 MMBtu on a calendar year total basis. Compliance shall be demonstrated by fuel records from the supplier showing the quantity and type of fuel delivered. Records of annual fuel use shall be kept on a monthly and calendar year basis. Documentation shall also include calculated heat input to demonstrate compliance with the limit of total heat input on a calendar year total basis.

[06-096 C.M.R. ch. 115, BPT]

- 2. Eurovia shall not purchase or otherwise obtain distillate fuel with a maximum sulfur content that exceeds 0.0015% by weight (15 ppm).

[06-096 C.M.R. ch. 115, BPT]

- 3. Compliance shall be demonstrated by fuel records showing the quantity, type, and percent sulfur of the fuel used (if applicable). Records of annual fuel use shall be kept on a monthly and calendar year total basis. Fuel sulfur content compliance shall be demonstrated by fuel delivery receipts from the supplier, a statement from the supplier that the fuel delivered meets Maine's fuel sulfur content standards, certificate of analysis, or testing of fuel in the tank on-site. [06-096 C.M.R. ch. 115, BPT]

**B. Emissions shall not exceed the following [06-096 C.M.R. ch. 115, BPT]:**

<b>Fuel</b>	<b>PM (lb/hr)</b>	<b>PM<sub>10</sub> (lb/hr)</b>	<b>PM<sub>2.5</sub> (lb/hr)</b>	<b>SO<sub>2</sub> (lb/hr)</b>	<b>NO<sub>x</sub> (lb/hr)</b>	<b>CO (lb/hr)</b>	<b>VOC (lb/hr)</b>
Distillate Fuel/	0.16	0.16	0.16	--	0.29	0.07	--
Propane	0.10	0.10	0.10	--	0.28	0.16	0.02
Natural Gas	0.10	0.10	0.10	--	0.19	0.16	0.01

- C. Visible emissions from HYCO 200 when firing distillate fuel shall not exceed 20% opacity on a six-minute block average basis.  
[06-096 C.M.R. ch. 101, § 4(A)(2)]
- D. Visible emissions from HYCO 200 when firing natural gas or propane shall not exceed 10% opacity on a six-minute block average basis.  
[06-096 C.M.R. ch. 101, § 4(A)(3)]

**(19) General Process Sources**

Visible emissions from any general process that is not part of a nonmetallic mineral processing plant shall not exceed 20% opacity on a six-minute block average basis. [06-096 C.M.R. ch. 101, § 4(B)(4)]

**(20) Fugitive Emissions**

- A. Eurovia shall not cause emissions of any fugitive dust during any period of construction, reconstruction, or operation without taking reasonable precautions. Such reasonable precautions shall be included in the facility's continuing program of best management practices for suppression of fugitive particulate matter. See 06-096 C.M.R. ch. 101, § 4(C) for a list of potential reasonable precautions.
- B. Eurovia shall not cause or allow visible emissions within 20 feet of ground level, measured as any level of opacity and not including water vapor, beyond the legal boundary of the property on which such emissions occur. Compliance with this standard shall be determined pursuant to 40 C.F.R. Part 60, Appendix A, Method 22.

[06-096 C.M.R. ch. 101, § 4(C)]

**(21) Order Availability**

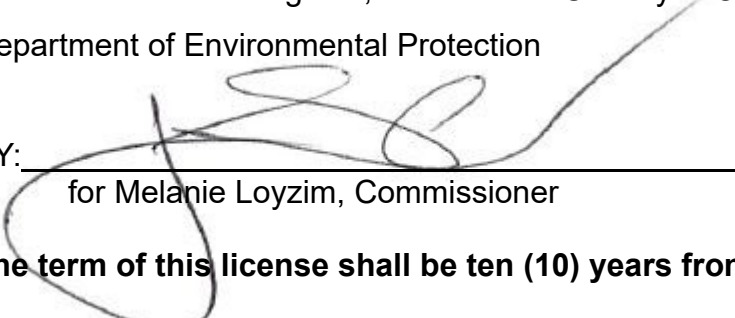
Eurovia shall keep a copy of this Order on site with the licensed equipment and ensure the operator(s) are familiar with the terms of this Order.  
[06-096 C.M.R. ch. 115, BPT]

(22) **Additional Information**

If the Department determines that any parameter value pertaining to construction and operation of the emissions units, including but not limited to stack size, configuration, flow rate, emission rates, nearby structures, etc., deviates from what was submitted in the application or ambient air quality impact analysis for this air emission license, Eurovia may be required to submit additional information. Upon written request from the Department, Eurovia shall provide information necessary to demonstrate AAQS will not be exceeded, potentially including submission of an ambient air quality impact analysis or an application to amend this air emission license to resolve any deficiencies and ensure compliance with AAQS. Submission of this information is due within 60 days of the Department's written request unless otherwise stated in the Department's letter. [06-096 C.M.R. ch. 115, § 2(O)]

Done and Dated in Augusta, Maine this 15<sup>th</sup> day of JUNE, 2026.

Department of Environmental Protection

BY:   
\_\_\_\_\_

for Melanie Loyzim, Commissioner

**The term of this license shall be ten (10) years from the signature date above.**

[Note: If a renewal application, determined as complete by the Department, is submitted prior to expiration of this license, then pursuant to Title 5 M.R.S. § 10002, all terms and conditions of the license shall remain in effect until the Department takes final action on the license renewal application.]

**Please note attached sheet for guidance on appeal procedures.**

Date of initial receipt of application: 4/7/2026

Date of application acceptance: 4/8/2026

This Order prepared by Jack Doran, Bureau of Air Quality.